



THERMORY®
LEAVE A LASTING IMPACT

Product
Options

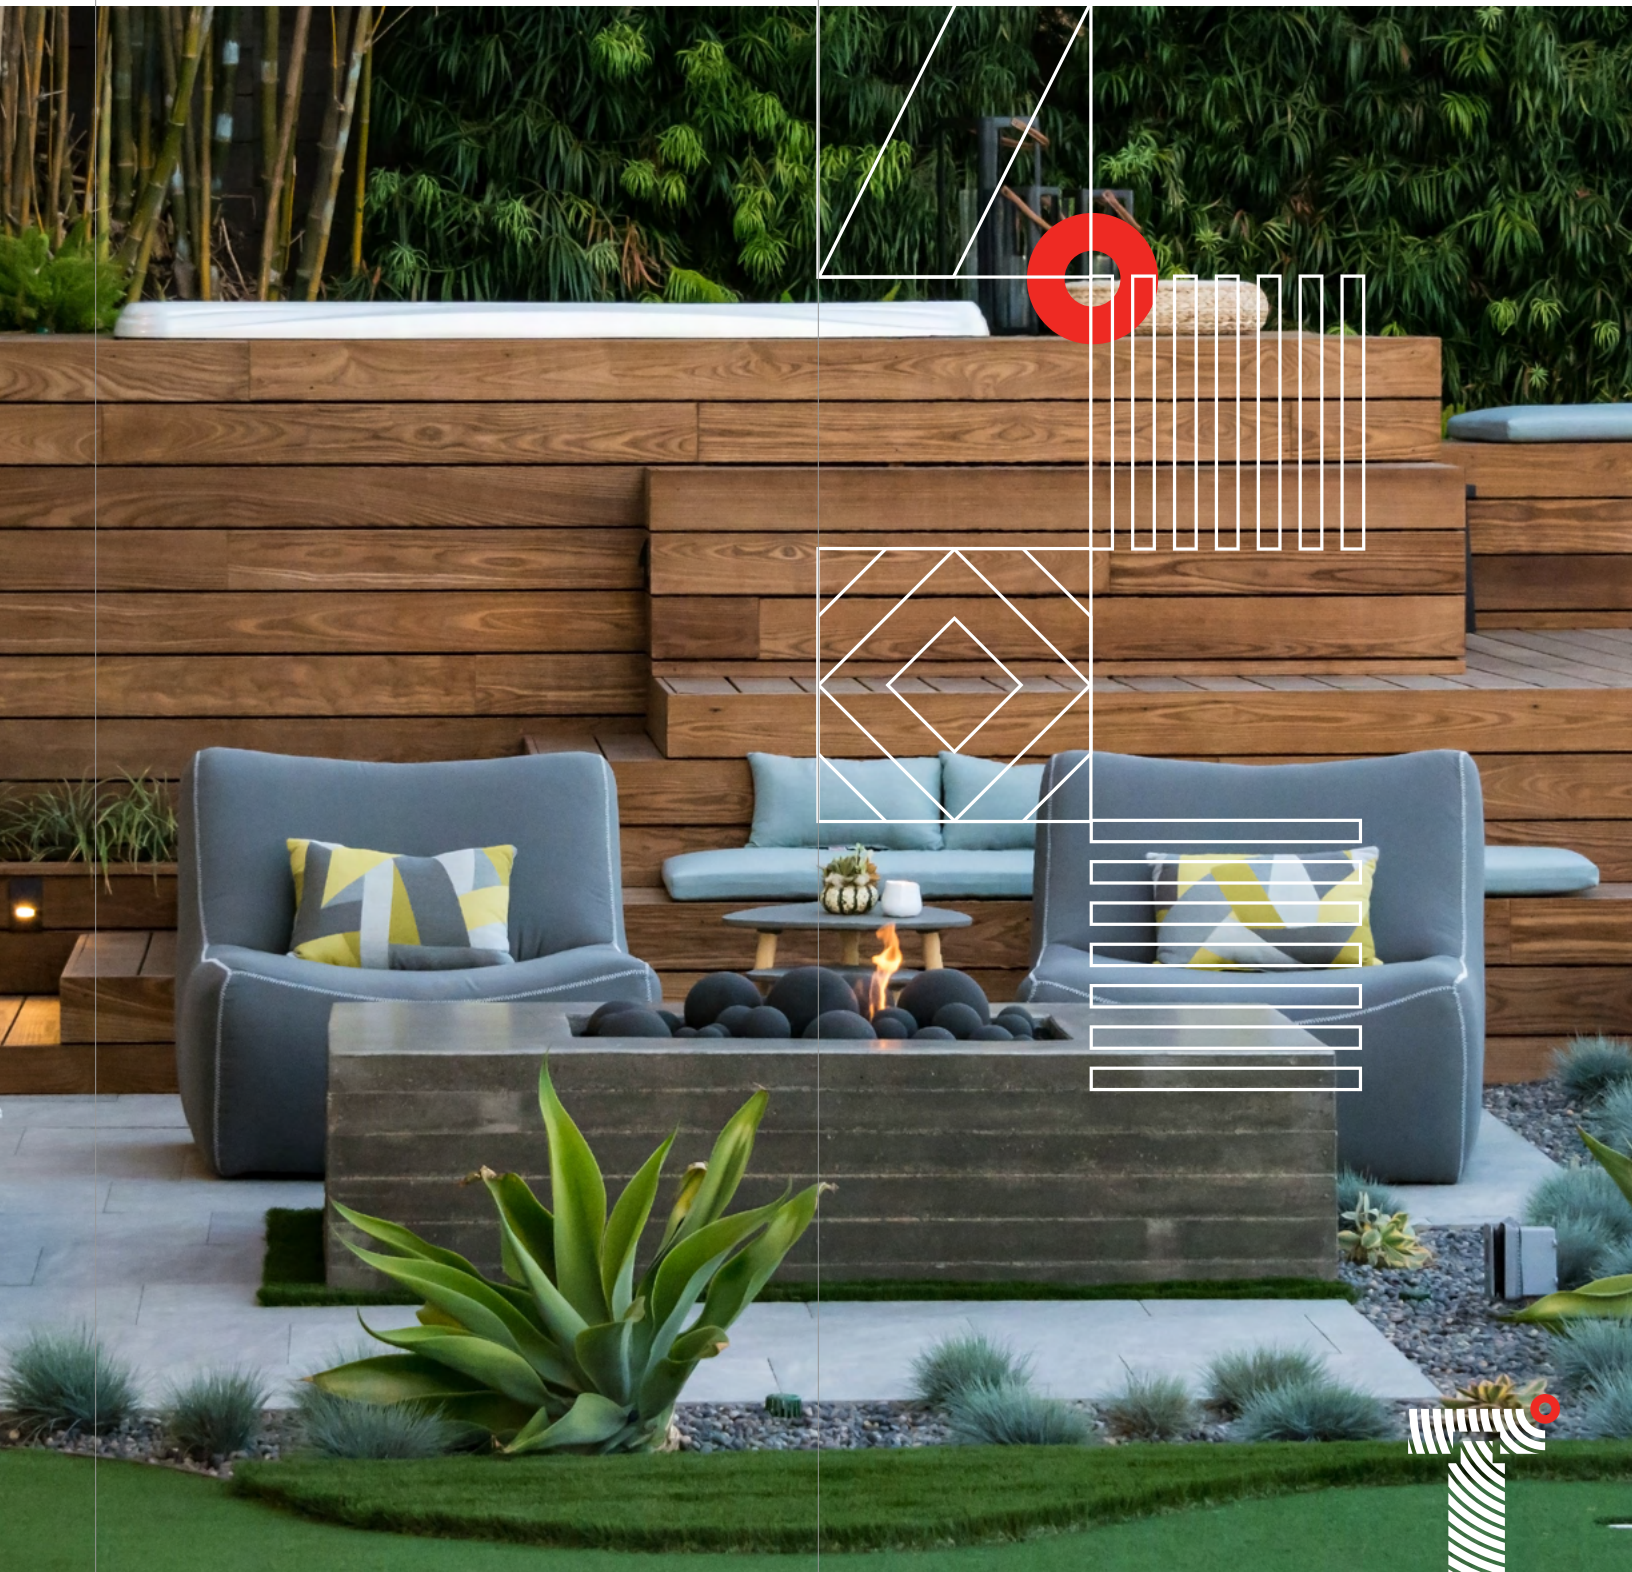

DECKING

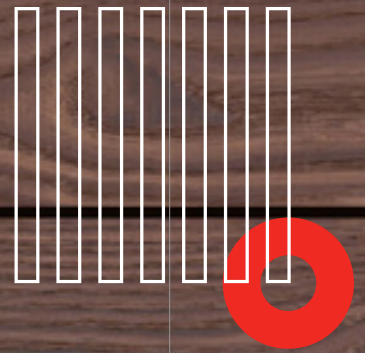

Smooth Finish



JEM Joints



Easy Installation



No Hot Feet



Low Maintenance

SPECIES:

White Ash
Red Oak
Scots Pine
Spruce

USE:

Interior
Exterior



BENCHMARK ASH
by THERMORY®

Decking

PRODUCT		SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
	1 X 4 ASH DECKING - GROOVED (JEM)	White Ash	.79" x 3.7"	3.7"	3' - 12'	Intense	Smooth	T4 Clip
	1 X 4 ASH DECKING - NO GROOVE (JEM)	White Ash	.79" x 3.7"	3.7"	3' - 12'	Intense	Smooth	40mm FG Screws — Pro Plug System
	1 X 6 ASH STANDARD DECKING - GROOVED (JEM)	White Ash	.79" x 5.2"	5.2"	3' - 12'	Intense	Smooth	T6 Clip
	1 X 6 ASH STANDARD DECKING - NO GROOVE (JEM)	White Ash	.79" x 5.2"	5.2"	3' - 12'	Intense	Smooth	40mm FG Screws — Pro Plug System
	1 X 6 ASH MAX DECKING - GROOVED (JEM)	White Ash	.79" x 5.9"	5.9"	3' - 12'	Intense	Smooth	T6 Clip



BENCHMARK ASH
by THERMORY®

Decking

PRODUCT	SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
1 X 6 ASH MAX DECKING - NO GROOVE (JEM)	White Ash	.79" x 5.9"	5.9"	3' - 12'	Intense	Smooth	40mm FG Screws — Pro Plug System
5/4 X 4 ASH DECKING - GROOVED (JEM)	White Ash	1.02" x 3.5"	3.5"	3' - 12'	Intense	Smooth	T4 Clip
5/4 X 4 ASH DECKING - NO GROOVE (JEM)	White Ash	1.02" x 3.5"	3.5"	3' - 12'	Intense	Smooth	60mm FG Screws — Pro Plug System
5/4 X 5 ASH DECKING - GROOVED (JEM)	White Ash	1.02" x 4.5"	4.5"	3' - 12'	Intense	Smooth	T6 Clip
5/4 X 5 ASH DECKING - NO GROOVE (JEM)	White Ash	1.02" x 4.5"	4.5"	3' - 12'	Intense	Smooth	60mm FG Screws — Pro Plug System
5/4 X 5 ASH DECKING - PACS GROOVED (JEM)	White Ash	1.02" x 4.6"	4.6"	3' - 12'	Intense	Smooth	PaCS Deck- ing Strips
5/4 X 6 ASH STANDARD DECKING - GROOVED (JEM)	White Ash	1.02" x 5.1"	5.1"	3' - 12'	Intense	Smooth	T6 Clip
5/4 X 6 ASH STANDARD DECKING - NO GROOVE (JEM)	White Ash	1.02" x 5.1"	5.1"	3' - 12'	Intense	Smooth	60mm FG Screws — Pro Plug System
SPECIAL ORDER 5/4 X 6 ASH MAX DECKING - GROOVED (JEM)	White Ash	1.02" x 5.7"	5.7"	3' - 12'	Intense	Smooth	T6 Clip
SPECIAL ORDER 5/4 X 6 ASH MAX DECKING - NO GROOVE (JEM)	White Ash	1.02" x 5.7"	5.7"	3' - 12'	Intense	Smooth	60mm FG Screws — Pro Plug System



BENCHMARK RED OAK

Decking


PRODUCT		SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
	5/4 X 6 RED OAK STANDARD DECKING - GROOVED (JEM)	Red Oak	1.02" x 5.1"	5.1"	3' - 12'	Intense	Smooth	T6 Clip
	5/4 X 6 RED OAK STANDARD DECKING - NO GROOVE (JEM)	Red Oak	1.02" x 5.1"	5.1"	3' - 12'	Intense	Smooth	60mm FG Screws — Pro Plug System
	5/4 X 6 RED OAK MAX DECKING - GROOVED (JEM)	Red Oak	1.02" x 5.7"	5.7"	3' - 12'	Intense	Smooth	T6 Clip
	5/4 X 6 RED OAK MAX DECKING - NO GROOVE (JEM)	Red Oak	1.02" x 5.7"	5.7"	3' - 12'	Intense	Smooth	60mm FG Screws — Pro Plug System



BENCHMARK PINE

Decking

PRODUCT		SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
	5/4 X 6 PINE DECKING - GROOVED	Scots Pine	1.02" x 5.5"	5.5"	8' - 16'	Intense	Smooth	PC Clip
	5/4 X 6 PINE DECKING - NO GROOVE	Scots Pine	1.02" x 5.5"	5.5"	8' - 16'	Intense	Smooth	60mm FG Screws — Pro Plug System

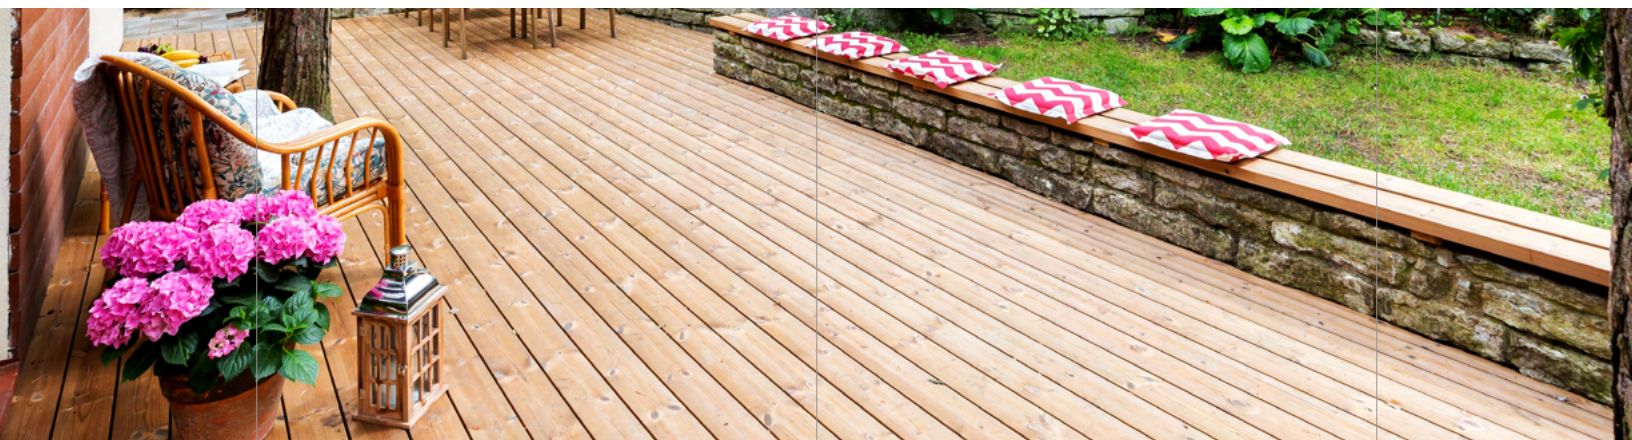

Decking

PRODUCT		SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
	*SPECIAL ORDER* 5/4 X 6 SPRUCE DECKING - GROOVED	Spruce	1.02" x 5.5"	5.5"	8' – 16'	Intense	Brushed, Rough	PC Clip
	*SPECIAL ORDER* 5/4 X 6 SPRUCE DECKING - NO GROOVE	Spruce	1.02" x 5.5"	5.5"	8' – 16'	Intense	Brushed, Rough	60mm FG Screws — Pro Plug System
	5/4 X 8 SPRUCE DECKING - GROOVED	Spruce	1.02" x 7.3"	7.3"	8' – 16'	Intense	Brushed, Rough	PC Clip
	5/4 X 8 SPRUCE DECKING - NO GROOVE	Spruce	1.02" x 7.3"	7.3"	8' – 16'	Intense	Brushed, Rough	60mm FG Screws — Pro Plug System




CLADDING



Dimensionally Stable



JEM Joints




Easy Installation



Sustainable



Low Maintenance

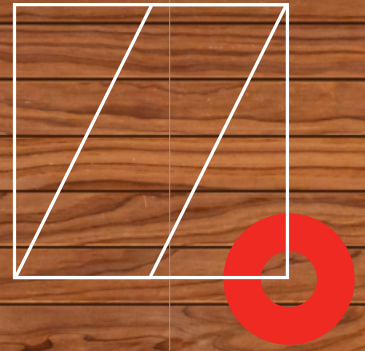

SPECIES:

White Ash
Red Oak
Scots Pine
Radiata Pine
Spruce

USE:

Interior
Exterior



BENCHMARK ASH
by THERMORY®

Cladding

PRODUCT		SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
	1 X 4 ASH CLADDING - T/G (JEM)	White Ash	.79" x 3.7"	3.5"	3' - 12'	Intense	Smooth	60mm FG Screws
	1 X 4 ASH CLADDING - C20 (JEM)	White Ash	.79" x 3.7"	3.5"	3' - 12'	Intense	Smooth	60mm FG Screws
	1 X 5 ASH CLADDING - T/G (JEM)	White Ash	.79" x 4.4"	4.2"	3' - 12'	Intense	Smooth	60mm FG Screws
	*SPECIAL ORDER* 1 X 5 ASH CLADDING - C20 (JEM)	White Ash	.79" x 4.4"	4.1"	3' - 12'	Intense	Smooth	60mm FG Screws
	*SPECIAL ORDER* 1 X 6 ASH CLADDING - C20 (JEM)	White Ash	.79" x 5.9"	5.6"	3' - 12'	Intense	Smooth	60mm FG Screws
	1 X 6 ASH CLADDING - T/G (JEM)	White Ash	.79" x 6.1"	5.9"	3' - 12'	Intense	Smooth	60mm FG Screws



BENCHMARK ASH
by THERMORY®

Cladding

PRODUCT	SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
 1 X 6 ASH CLADDING - PACS C23J (JEM)	White Ash	.79" x 5.9"	5.6"	3' - 12'	Intense	Smooth	PaCS Furring Strips
 *SPECIAL ORDER* 5/4 x 4 ASH CLADDING - C72 (JEM)	White Ash	1.02" x 3.6"	3.2"	3' - 12'	Intense	Smooth	60mm FG Screws
 *SPECIAL ORDER* 5/4 x 5 ASH CLADDING - C72 (JEM)	White Ash	1.02" x 4.6"	4.2"	3' - 12'	Intense	Smooth	60mm FG Screws



BENCHMARK RED OAK
by THERMORY®

Cladding

PRODUCT	SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
 1 X 6 RED OAK CLADDING - STANDARD C57 (JEM)	Red Oak	.79" x 5.2"	4.9"	3' - 12'	Intense	Smooth	60mm FG Screws
 1 X 6 RED OAK CLADDING - MAX C57 (JEM)	Red Oak	.79" x 5.9"	5.6"	3' - 12'	Intense	Smooth	60mm FG Screws



BENCHMARK CLEAR PINE
by THERMORY®

Cladding

PRODUCT	SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
 1 X 3 CLEAR PINE CLADDING - PACS C7J (JEM)	Radiata Pine	.79" x 2.6"	2.8"	8' - 10'	Intense	Smooth	PaCS Aluminum Start Rail
 1 X 6 CLEAR PINE CLADDING - C19 (JEM) BRUSHED	Radiata Pine	.79" x 5.4"	5.2"	8' - 16'	Intense	Brushed	60mm FG Screws



BENCHMARK CLEAR PINE

Cladding

PRODUCT		SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
	*SPECIAL ORDER* 1 X 6 CLEAR PINE CLADDING - C19 (JEM) SMOOTH	Radiata Pine	.79" x 5.4"	5.2"	8' - 16'	Intense	Smooth	60mm FG Screws
	*SPECIAL ORDER* 1 X 6 CLEAR PINE CLADDING - CAR3G (JEM)	Radiata Pine	.79" x 5.4"	4.8"	8' - 16'	Intense	Smooth	60mm FG Screws
	*SPECIAL ORDER* 1 X 6 CLEAR PINE CLADDING - CAR3G STRIPES	Radiata Pine	.75" x 5.4"	4.8"	8' - 16'	Intense	Smooth	60mm FG Screws
	*SPECIAL ORDER* 1 X 6 CLEAR PINE CLADDING - CAR3G STRIPES	Radiata Pine	.75" x 5.4"	4.8"	8' - 16'	Intense	Brushed	60mm FG Screws



BENCHMARK PINE

Cladding

PRODUCT		SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
	1 X 6 PINE CLADDING - C19 (JEM) REVERSIBLE	Scots Pine	.79" x 5.5"	5.2"	8' - 16'	Intense	Smooth, Rough	60mm FG Screws
	*ALSO AVAILABLE IN CLEAR PINE* 1 X 6 PINE CLADDING - C87 V-GROOVE (JEM)	Scots Pine	.79" x 5.4"	5.0"	8' - 16'	Intense	Smooth	60mm FG Screws
	*SPECIAL ORDER* 1 X 4 PINE CLADDING - C34 (JEM) MIX & MATCH	Scots Pine	.79" x 3.5"	2.8"	8' - 16'	Intense	Smooth	60mm FG Screws
	*SPECIAL ORDER* 1 X 6 PINE CLADDING - C34 (JEM) MIX & MATCH	Scots Pine	.79" x 5.5"	4.8"	8' - 16'	Intense	Smooth	60mm FG Screws



BENCHMARK PINE
by THERMORY®

Cladding

PRODUCT		SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
	*SPECIAL ORDER* 2 X 3 PINE CLADDING - C34 MIX & MATCH	Scots Pine	1.6" x 2.6"	1.9"	8' - 16'	Intense	Smooth	60mm FG Screws
	*SPECIAL ORDER* 5/4 X 5 PINE CLADDING - C34 (JEM) MIX & MATCH	Scots Pine	1.02" x 4.5"	3.8"	8' - 16'	Intense	Smooth	60mm FG Screws
	*SPECIAL ORDER* 1 X 4 PINE CLADDING - C34 MIX & MATCH STRIPES	Scots Pine	.75" x 3.5"	2.5"	8' - 16'	Intense	Smooth	60mm FG Screws
	*SPECIAL ORDER* 1 X 4 PINE CLADDING - C34 MIX & MATCH STRIPES	Scots Pine	.75" x 3.5"	2.5"	8' - 16'	Intense	Brushed	60mm FG Screws
	*SPECIAL ORDER* 1 X 6 PINE CLADDING - C34 MIX & MATCH STRIPES	Scots Pine	.75" x 5.5"	4.5"	8' - 16'	Intense	Smooth	60mm FG Screws
	*SPECIAL ORDER* 1 X 6 PINE CLADDING - C34 MIX & MATCH STRIPES	Scots Pine	.75" x 5.5"	4.5"	8' - 16'	Intense	Brushed	60mm FG Screws
	*SPECIAL ORDER* 2 X 3 PINE CLADDING - C34 MIX & MATCH STRIPES	Scots Pine	1.61" x 2.6"	1.6"	8' - 16'	Intense	Smooth	60mm FG Screws
	*SPECIAL ORDER* 2 X 3 PINE CLADDING - C34 MIX & MATCH STRIPES	Scots Pine	1.61" x 2.6"	1.6"	8' - 16'	Intense	Brushed	60mm FG Screws
	*SPECIAL ORDER* 5/4 X 5 PINE CLADDING - C34 MIX & MATCH STRIPES	Scots Pine	.98" x 4.5"	3.5"	8' - 16'	Intense	Smooth	60mm FG Screws
	*SPECIAL ORDER* 5/4 X 5 PINE CLADDING - C34 MIX & MATCH STRIPES	Scots Pine	.98" x 4.5"	3.5"	8' - 16'	Intense	Brushed	60mm FG Screws






BENCHMARK PINE
by THERMORY®


Cladding

PRODUCT		SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
	*SPECIAL ORDER* 5/4 X 6 PINE CLADDING - C8G STRIPES	Scots Pine	.98" x 5.5	4.7"	8' - 16'	Intense	Smooth	60mm FG Screws
	*SPECIAL ORDER* 5/4 X 6 PINE CLADDING - C8G STRIPES	Scots Pine	.98" x 5.5	4.7"	8' - 16'	Intense	Brushed	60mm FG Screws


IGNITE
by THERMORY®

Cladding

PRODUCT		SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
	1 X 6 SPRUCE CLADDING - GROOVED C24 (JEM) DRAGON SCALE	Spruce	.79" x 5.5"	5.2"	8' - 16'	Intense	Embossed	60mm FG Screws (black finish available)
	1 X 6 SPRUCE CLADDING - GROOVED C24 (JEM) BRUSHED	Spruce	.79" x 5.5"	5.2"	8' - 16'	Intense	Brushed	60mm FG Screws (black finish available)
	1 X 8 SPRUCE CLADDING - GROOVED C24 (JEM) DRAGON SCALE	Spruce	.79" x 7.3"	6.9"	8' - 16'	Intense	Embossed	60mm FG Screws (black finish available)
	*SPECIAL ORDER* 1 X 8 SPRUCE CLADDING - GROOVED C24 (JEM) BRUSHED	Spruce	.79" x 7.3"	6.9"	8' - 16'	Intense	Brushed	60mm FG Screws (black finish available)

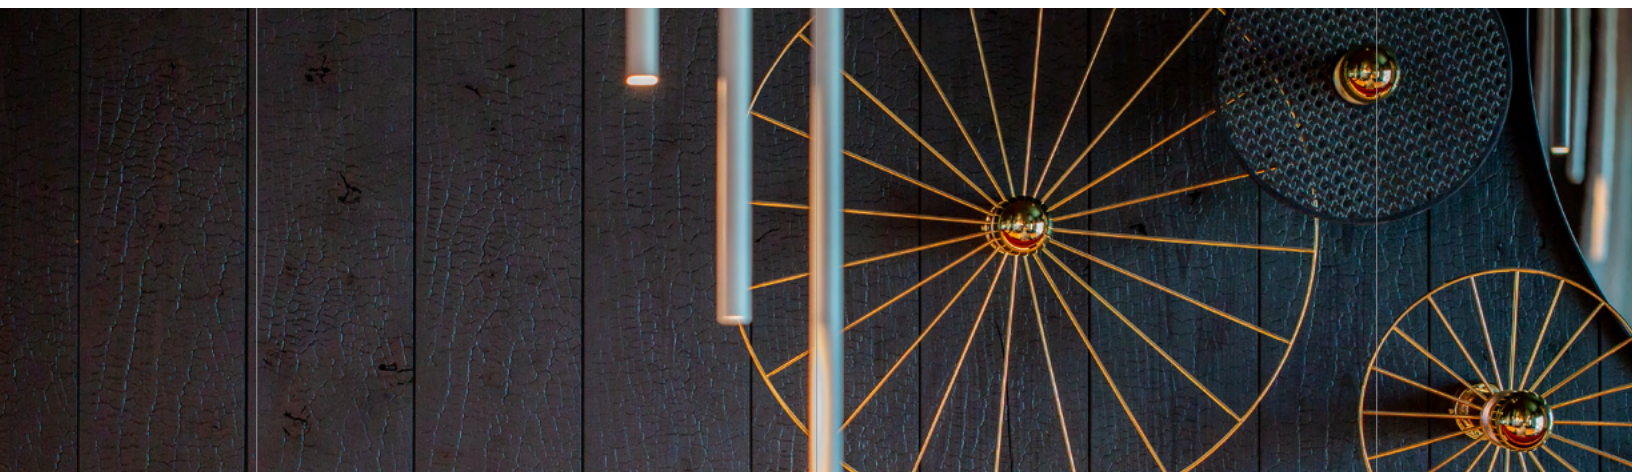

PRODUCT	SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
 1 X 8 SPRUCE CLADDING - C15 (JEM)	Spruce	.79" x 7.3"	6.9"	8' - 16'	Intense	Brushed	60mm FG Screws
 *SPECIAL ORDER* 5/4 X 6 SPRUCE CLADDING - CAR10G STRIPES	Spruce	.98" x 5.5	4.7"	8' - 16'	Intense	Smooth	60mm FG Screws
 *SPECIAL ORDER* 5/4 X 6 SPRUCE CLADDING - CAR10G STRIPES	Spruce	.98" x 5.5	4.7"	8' - 16'	Intense	Brushed	60mm FG Screws
 *SPECIAL ORDER* 5/4 X 7 SPRUCE CLADDING - GROOVED C75 (JEM)	Spruce	1.02" x 6.3"	5.9"	8' - 16'	Intense	Smooth	60mm FG Screws
 *SPECIAL ORDER* 5/4 X 8 SPRUCE CLADDING - GROOVED C75 (JEM)	Spruce	1.02" x 7.3"	6.9"	8' - 16'	Intense	Smooth	60mm FG Screws
 *SPECIAL ORDER* 1 X 8 SPRUCE CLADDING - C15 (JEM) DUNE	Spruce	.79" x 7.3"	6.9"	8' - 16'	Intense	Embossed	60mm FG Screws

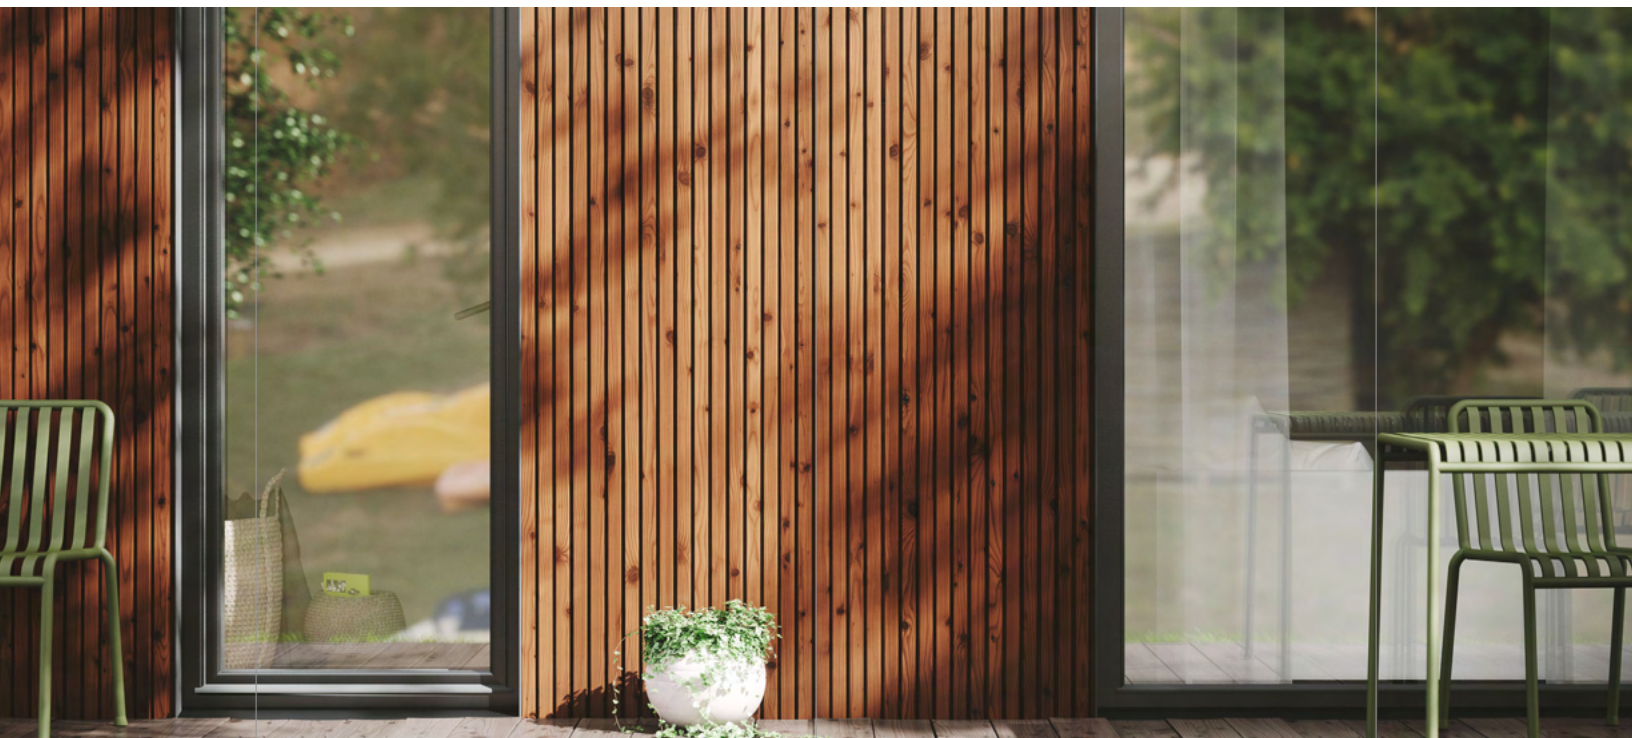


PORCH FLOORING




Smooth Finish



JEM Joints



Easy Installation



Expansion Beads



Low Maintenance

SPECIES:

White Ash
Scots Pine

USE:

Exterior



BENCHMARK
by THERMORY®

Porch Flooring

PRODUCT	SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
 1 X 4 ASH PORCH FLOORING - T/G (JEM)	White Ash	.79" x 3.7"	3.5"	3' – 12'	Intense	Smooth	60mm FG Screws
 SPECIAL ORDER 5/4 X 5 PINE PORCH FLOORING - T/G (JEM)	Scots Pine	1.02" x 4.5"	4.3"	8' – 16'	Intense	Smooth	60mm FG Screws



TRIM

SPECIES:

White Ash
Red Oak
Scots Pine
Radiata Pine
Spruce

USE:

Interior
Exterior

Trim


PRODUCT

	ASH TRIM	2" x 6" 2" x 4" 5/4" x 4" 5/4" x 5" 5/4" x 6" Standard 5/4" x 6" Max * 1" x 4" 1" x 6" Standard 1" x 6" Max 1" x 5" 1" x 8"
	RED OAK TRIM	5/4" x 6" Standard 5/4" x 6" Max
	PINE TRIM	2" x 6" 2" x 4" 5/4" x 6" 1" x 6"
	CLEAR PINE TRIM	1" x 6"
	KODIAK SPRUCE TRIM	5/4" x 6" * 5/4" x 8"

*Special Order




INTERIOR PANELING

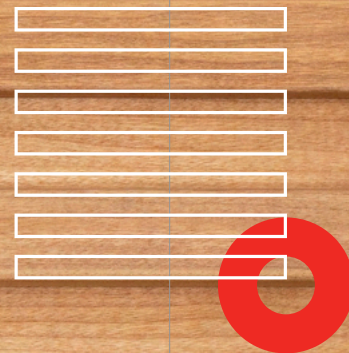


Smooth Finish



Sustainable



Easy Installation



Low Maintenance



Endless Combinations

SPECIES:

Alder
Aspen
Medium Aspen
Medium Magnolia
Medium Spruce

USE:

Interior


INTERIOR
by THERMORY®

Wall Paneling

PRODUCT		SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
	5/4 X 3 ALDER STEP	Alder	1.06" x 2.5"	2.2"	6' – 10'	None	Smooth	Staple
	1 X 5 ALDER STS4	Alder	.59" x 4.7"	4.4"	6' – 10'	None	Smooth	Staple
	1 X 5 ALDER STS4 BRUSHED	Alder	.59" x 4.7"	4.4"	6' – 10'	None	Brushed	Staple
	1 X 4 ALDER STS4	Alder	.59" x 3.5"	3.2"	6' – 10'	None	Brushed	Staple
	1 X 5 ASPEN STS4	Aspen	.59" x 4.7"	4.4"	6' – 10'	None	Smooth	Staple

PRODUCT		SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
	5/4 X 3 ASPEN STEP	Aspen	1.06" x 2.5"	2.2"	6' – 10'	Medium	Smooth	Staple
	1 X 4 ASPEN STS4	Aspen	.59" x 3.5"	3.2"	6' – 10'	Medium	Smooth	Staple
	1 X 5 ASPEN STS4	Aspen	.59" x 4.7"	4.4"	6' – 10'	Medium	Smooth	Staple
	1 X 4 ASPEN KYTE	Aspen	.59" x 3.4"	3.1"	6' – 10'	Medium	Smooth	Staple
	1 X 4 ASPEN VIRE	Aspen	.59" x 3.5"	3.1"	6' – 10'	Medium	Smooth	Staple
	*SPECIAL ORDER* 1 X 4 ASPEN WAVE	Aspen	1.1" x 2.6"	2.2"	6' – 10'	Medium	Smooth	Staple
	*SPECIAL ORDER* 1 X 4 ASPEN STF TILES	Aspen	.59" x 3.2"	3.0"	11.50" or 22.75"	Medium	Smooth	Staple
	*SPECIAL ORDER* 1 X 4 ASPEN SRP	Aspen	.59" x 3.1"	2.8"	6' – 10'	Medium	Smooth	Staple
	1 X 7 MAGNOLIA STS10	Magnolia	.56" x 6.7"	6.4"	6' – 10'	Medium	Smooth	Staple
	1 X 4 SPRUCE STS4	Spruce	.59" x 3.5"	3.2"	6' – 10'	Medium	Smooth	Staple

PRODUCT		SPECIES	DIMENSIONS	COVERAGE	LENGTHS	MODIFICATION STRENGTH	TEXTURE	INSTALLATION
	1 X 4 ALDER SHP	Alder	.83" x 3.5"	3.5"	6' – 10'	None	Smooth	40mm FG Screws
	5/4 X 4 ALDER SHP	Alder	1.1" x 3.5"	3.5"	6' – 10'	None	Smooth	40mm FG Screws
	5/4 X 4 ASPEN SHP	Aspen	1.1" x 3.5"	3.5"	6' – 10'	None	Smooth	40mm FG Screws
	1 X 4 ASPEN SHP	Aspen	.83" x 3.5"	3.5"	6' – 10'	Medium	Smooth	40mm FG Screws
	5/4 X 4 ASPEN SHP	Aspen	1.1" x 3.5"	3.5"	6' – 10'	Medium	Smooth	40mm FG Screws
	5/4 X 8 MAGNOLIA SHP	Magnolia	1.1" x 7.3"	7.3"	6' – 10'	Medium	Smooth	40mm FG Screws
	5/4 X 4 SPRUCE SHP	Spruce	1.01" x 3.5"	3.5"	6' – 10'	Medium	Smooth	40mm FG Screws

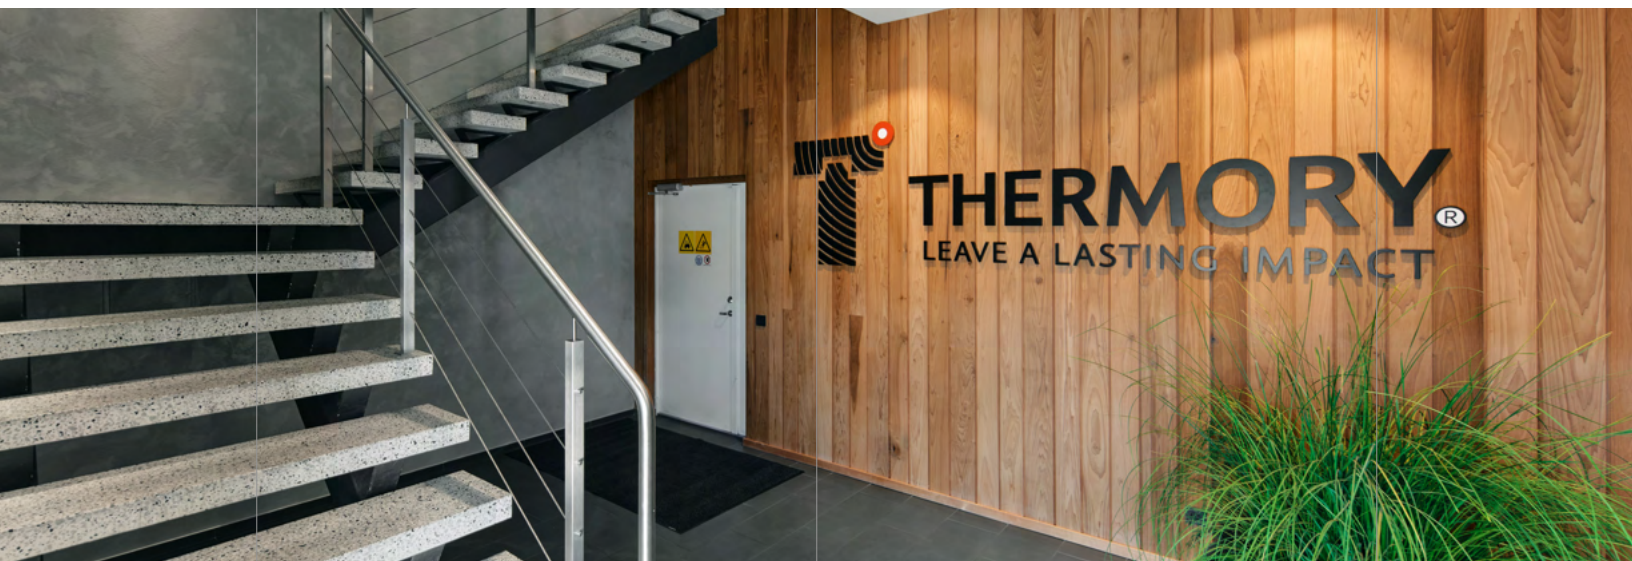



HARDWARE

PRODUCT	NAME	TYPE	USE
	6" HIDDEN CLIP WITH SCREW (PC)	Plastic	Benchmark Pine/ Kodiak Decking
	6" HIDDEN CLIP WITH SCREW (T6)	Stainless Steel	6" Benchmark Ash Decking
	4" HIDDEN CLIP WITH SCREW (T4)	Stainless Steel	4" Benchmark Ash Decking
	STARBORN PRO PLUGS (WHITE ASH)	Thermory White Ash	Benchmark Ash Decking
	STARBORN PRO PLUGS (SCOTS PINE)	Thermory Scots Pine	Benchmark Pine/ Kodiak Decking
	STARBORN PRO PLUG TOOL	NA	Used with Starborn Pro Plugs
	4.0 X 60MM FG SOLIDA 1 SCREW	Stainless Steel/ Self Tapping	Decking Cladding Porch Flooring
	4.0 X 40MM FG SOLIDA 1 SCREW	Stainless Steel/ Self Tapping	.79" Thick Material & Decking ONLY
	3.2 X 60MM FG SOLIDA 1 SCREW	Stainless Steel/ Self Tapping	Cladding Best on Ignite
	PACS CLADDING STRIP	Marine Grade Birch Plywood	C23J PaCS Cladding
	PACS ALUMINUM START RAIL	Aluminum	C7J Clear Pine Cladding
	QUARRIX PROTECT FURRING STRIPS	HDPE Plastic	Benchmark Ash Cladding
	PACS DECKING STRIPS	Plastic	PaCS Benchmark Ash Decking

Thermory USA - Denver

537 W. Highlands Ranch Pkwy, Ste. 114
Highlands Ranch, CO 80129
720.759.7268
support@thermoryusa.com

Thermory USA - Buffalo

56 Harvester Ave, Ste. 1-201
Batavia, NY 14020
585.591.6590
support@thermoryusa.com

Last updated: January 2024
All previous versions are null and void.

→ thermoryusa.com



THERMORY®
LEAVE A LASTING IMPACT

